
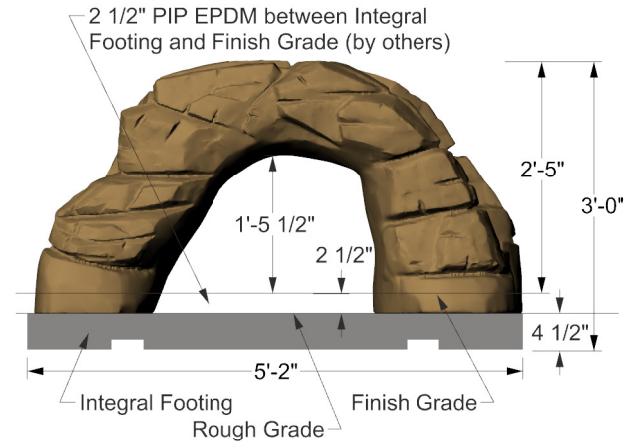


# Rock Bridge Spec Sheet

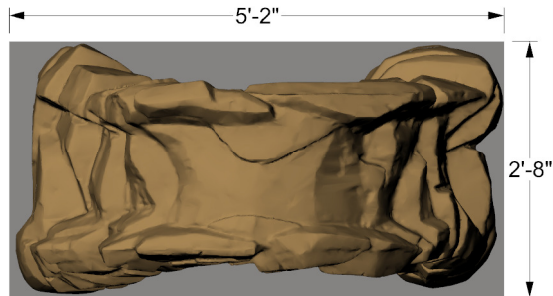

## Notes:


Material - Imagicast Precast Concrete.  
Finish/Texture - Light Etch  
Quantity - 1 each  
Concrete Color - PST  
Stain - Limestone  
Sealer - Acrylic Concrete Sealer

Install with reach fork or crane from slings.  
Weight - 2,500 lbs.  
Footing - integral, install below PIP EPDM

Precast concrete, especially once sandblasted, will show cracks. This is not considered a defect unless the crack is structural in nature, meaning it effects the structural integrity of the part.

Local Building Departments may require additional site poured footings. These footings and associated engineering are not within the scope of this submittal

Install with crane or Reach Fork with straps as shown. Follow all OSHA, local, State and Federal safety guidelines during installation. Use straps rated for weight of parts. Contact manufacture immediately to answer questions during installation.

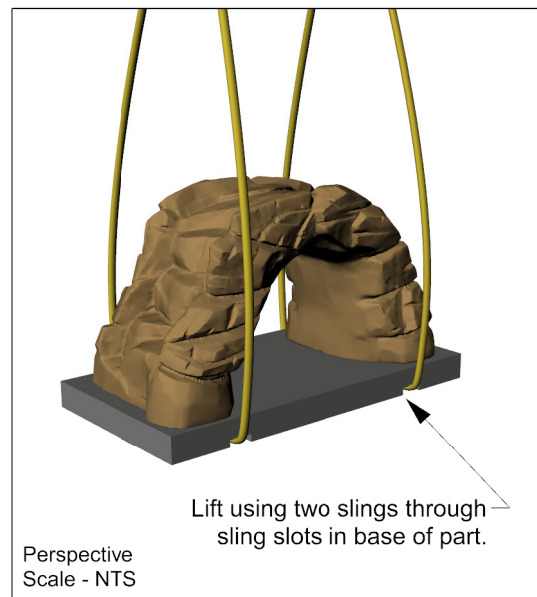

|                     |                                |                     |
|---------------------|--------------------------------|---------------------|
| Rep: Sue Churchich  | Company: Churchich Rec. & Des. | Phone: 843-757-3156 |
| Contractor: tbd     | Project: tbd                   |                     |
| Desc: Stone Bridge  | Model # custom                 |                     |
| Plant: 530-605-2664 | Date: 5-14-18                  | Contact: Dan C      |
|                     | Rev: na                        | Page: 1/1           |

**UPC Parks**  
530-605-2664  
www.upcparks.com