

USER GROUP: 2-5 Years**RECOMMENDED CREW:** 2 People**TOOLS REQUIRED:**

- TT-45 Torx
- Level, Square
- Drill Bits: None
- High Speed 3/8" Electric Drill with Clutch

NOTE: Use of any other driver may result in damage to tool and/or hardware!**INSTALLATION TIME:** 1/2 Hour**WEIGHT:** 81 lbs.**CONCRETE REQUIRED:** None


ITEM	Part No.	QTY	DESCRIPTION
1	RSP02758XX	1	Routed Fun Table Upright #1
2	RSP02759XX	1	Routed Fun Table Upright #2
3	RSP02760XX	1	Routed Fun Table Seat
4	RSP02761XX	1	Routed Fun Table Top
5	30318103XX	14	Bracket-L-2 3/4" X 1 3/4" X 1 1/2" (Coated)
6	HWB0210	10	Bolt - 3/8" x 1" Security Torx With Patch
7	HWB0315	12	Bolt - 3/8" x 3/4" Security Torx With Patch
8	HWN0114	22	Nut - 3/8" x 1" Round Weld Nut
9	HWWR0096	10	Washer 3/8" ID x 7/8" OD x 0.11" thick Flat SS

PRE-INSTALLATION CHECK:

Customer is responsible for verifying materials received by comparing received items with packing list. If any parts are missing or damaged, contact your local sales representative immediately.


Supplier is not responsible for items discovered missing after 72 hours from time of delivery.

Before beginning installation, all installers must read and understand the Installation Introduction manual as supplied. If you did not receive a copy, or if you have any questions regarding any information in the Installation Instructions or this Installation Guideline, contact your local sales representative.

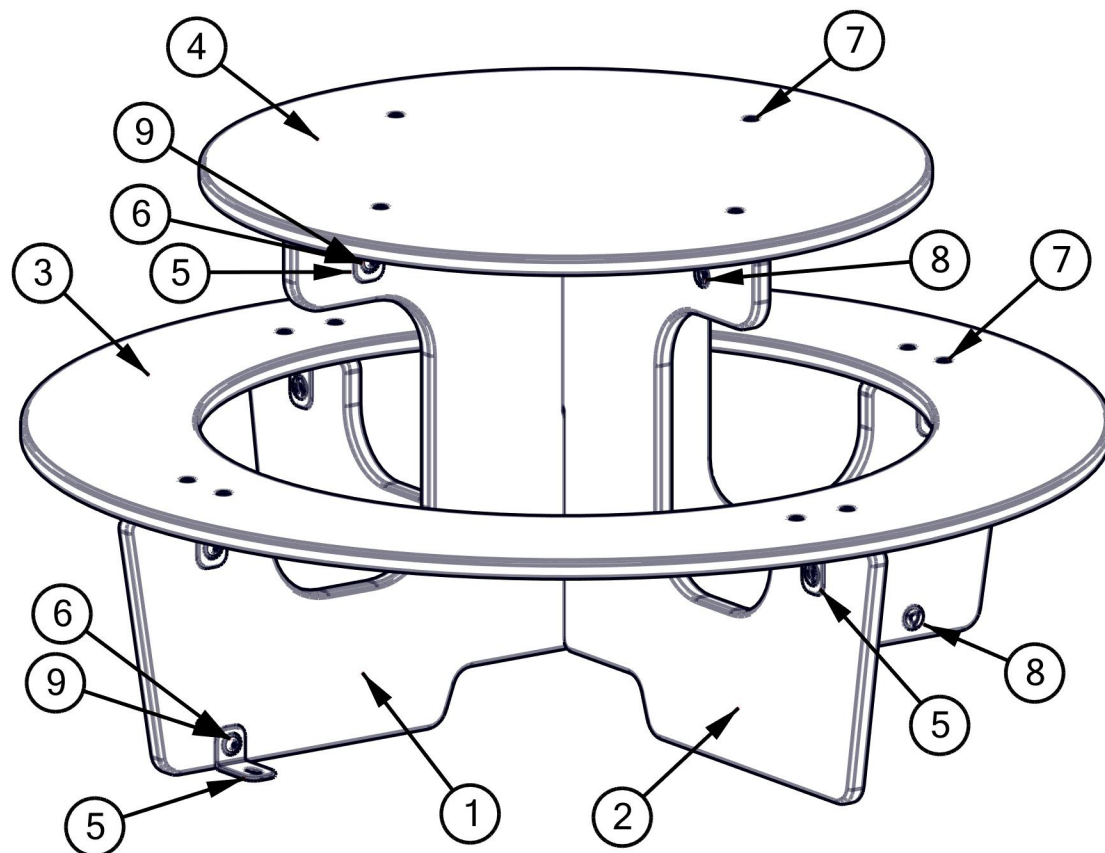


STEP 1

Assemble two center supports. Stand up center support with upper slot. Slide center support with lower slot into upper slot. Leave assembly upright.

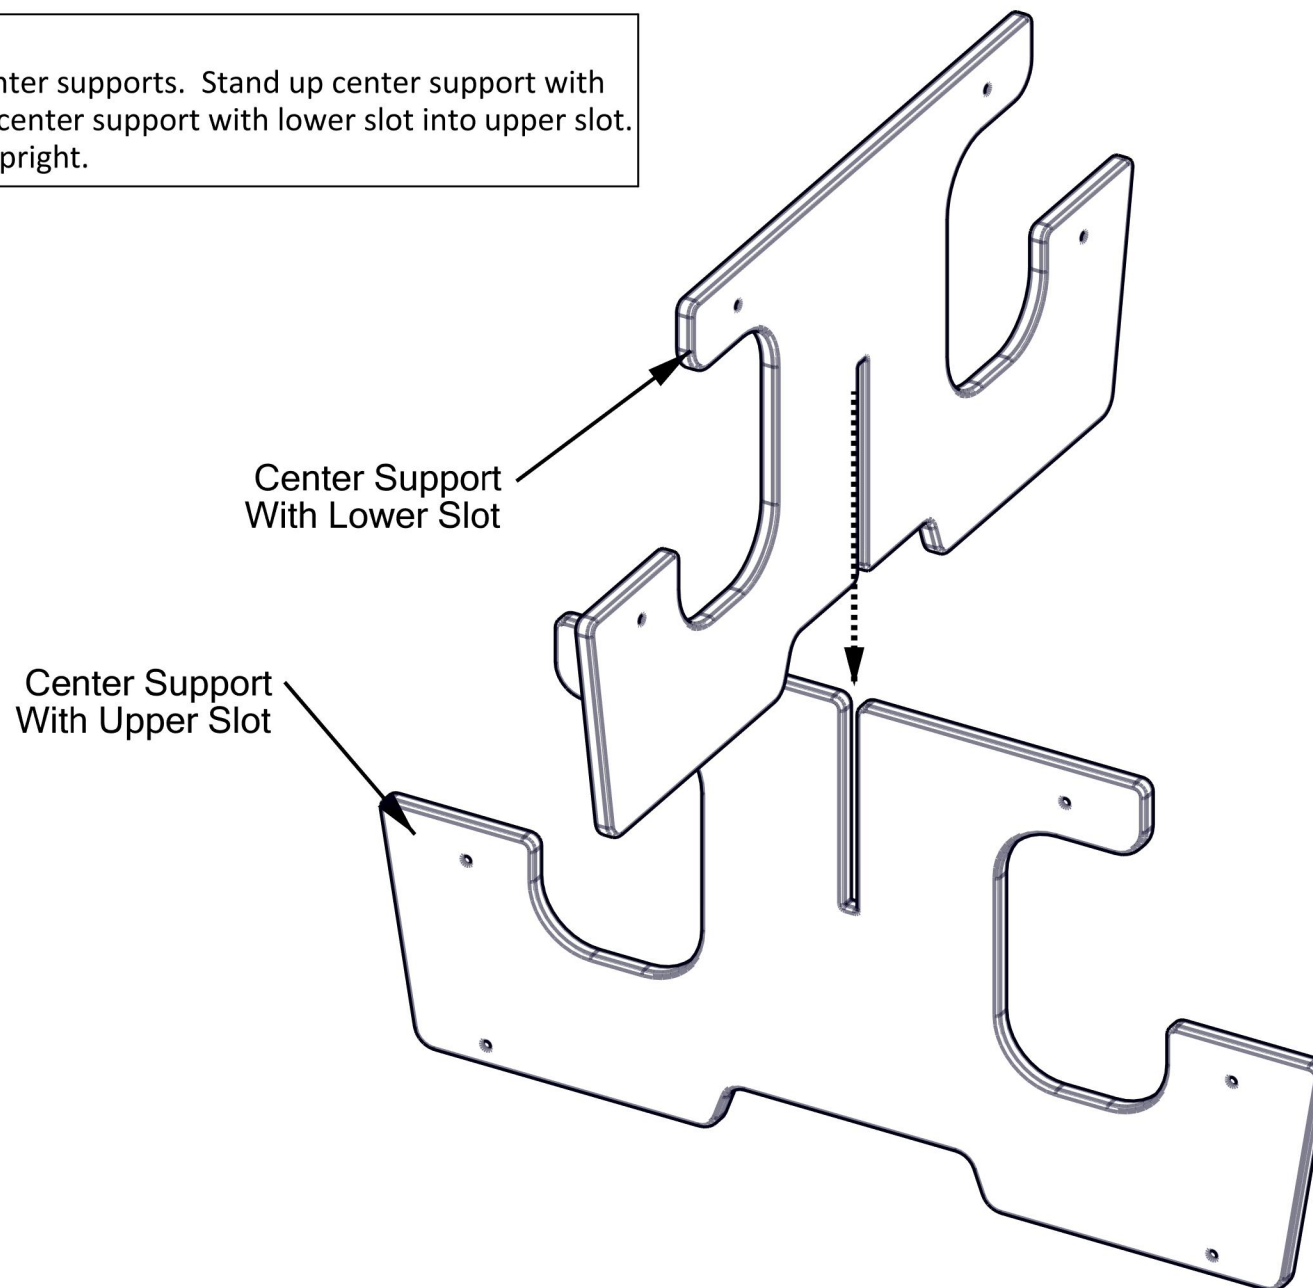


STEP 2

Assemble seat bracket sets to center supports. At each lower hole on center supports, assemble two (2) 1-3/4" x 2-3/4" brackets, one (1) 3/8" x 7/8" flat washer, one (1) 3/8" x 1" security TORX, and one (1) 3/8" x 1" weld nut. See Detail 2-1. Repeat Detail 2-1 for all four lower holes on center support. **DO NOT FULLY TIGHTEN CONNECTIONS.**

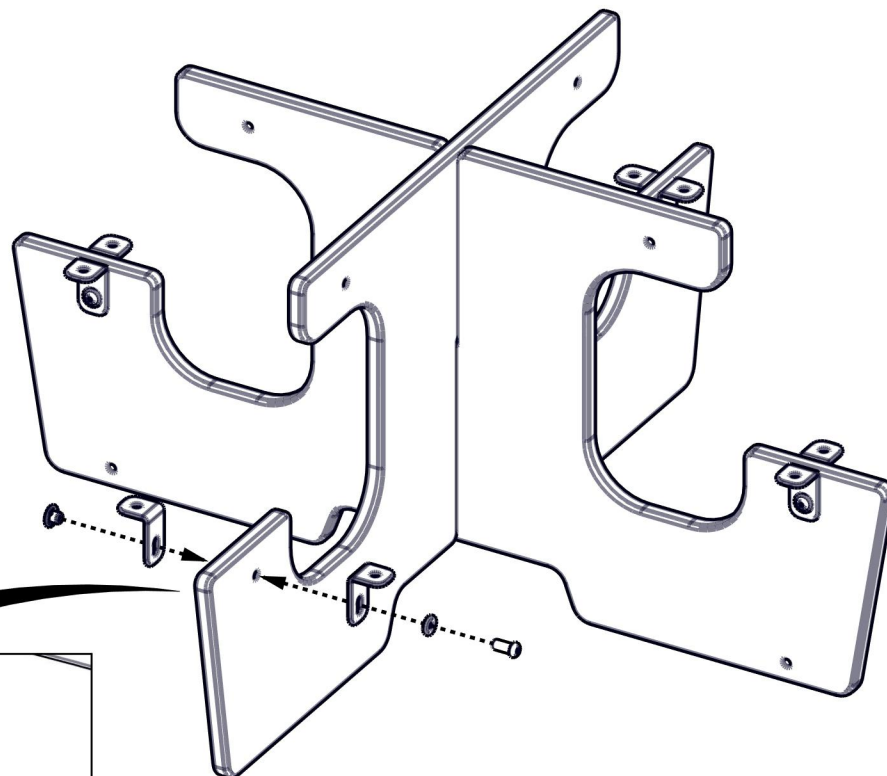



Detail 2-1

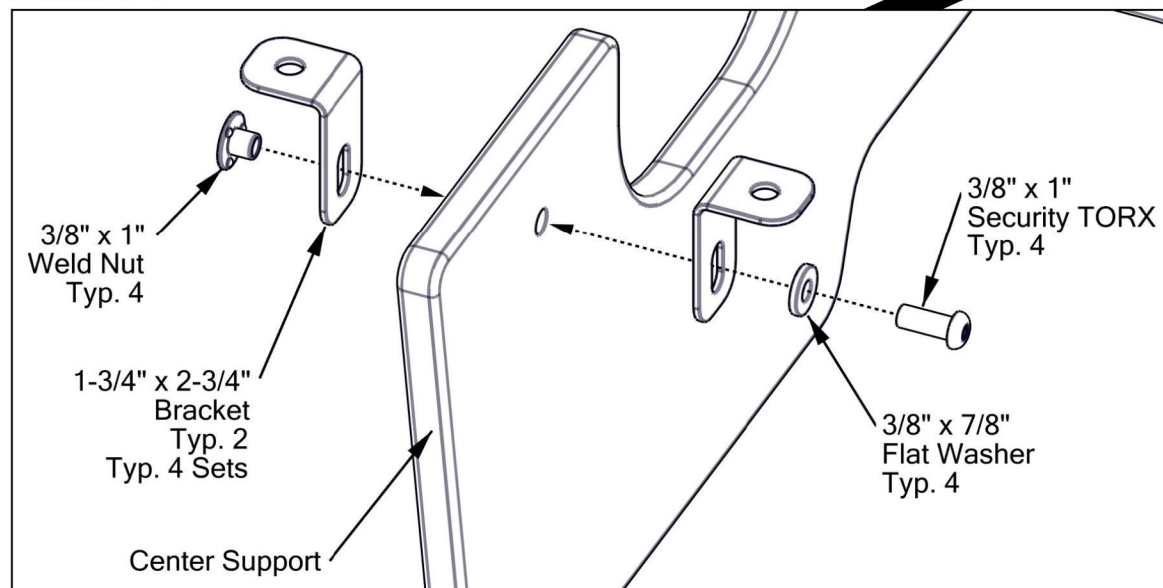

STEP 3

Assemble table top bracket sets to center supports. At each upper hole on center supports, assemble one (1) 1-3/4" x 2-3/4" bracket, one (1) 3/8" x 7/8" flat washer, one (1) 3/8" x 1" security TORX, and one (1) 3/8" x 1" weld nut. See Detail 3-1. Repeat Detail 3-1 for all four upper holes on center support. **DO NOT FULLY TIGHTEN CONNECTIONS.**



Detail 3-1

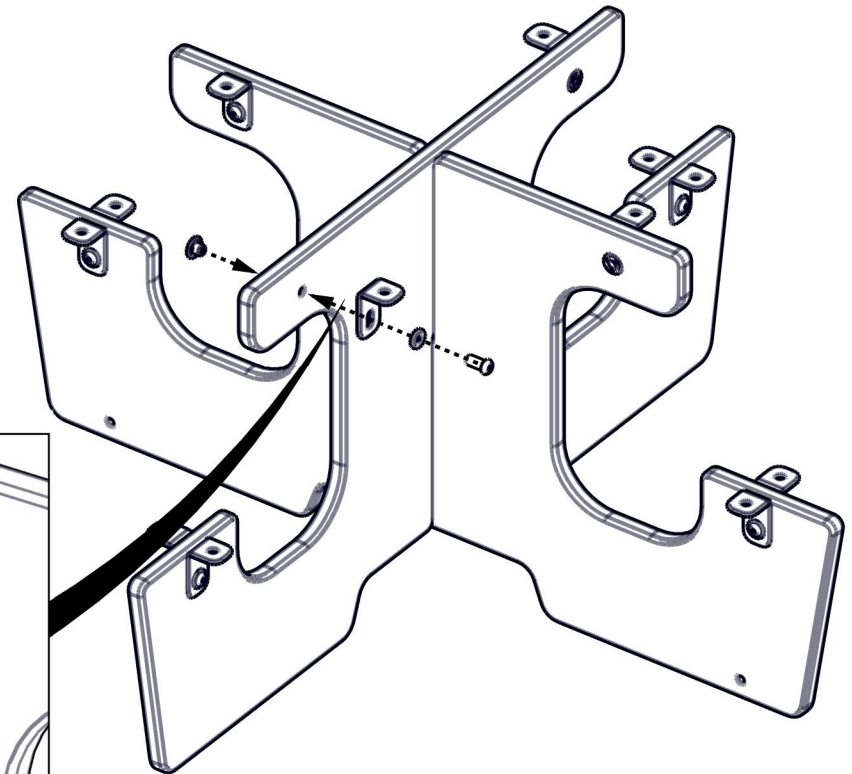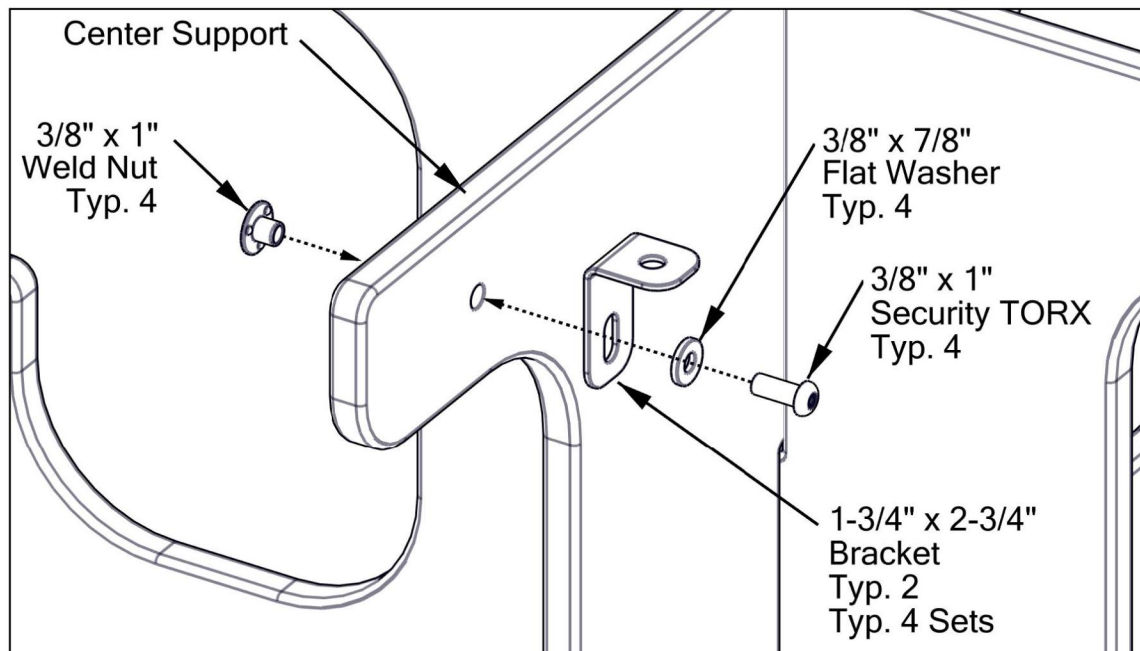

STEP 4

Secure seat ring to center supports. Place seat ring onto center supports. Countersunk holes face up. Align holes in seat ring with holes in brackets. Secure each location with two (2) 3/8" x 3/4" security TORX through seat ring and two (2) 3/8" x 1" weld nuts through bracket and seat ring bottom. See Detail 4-1. Fully tighten all connections.



Detail 4-1

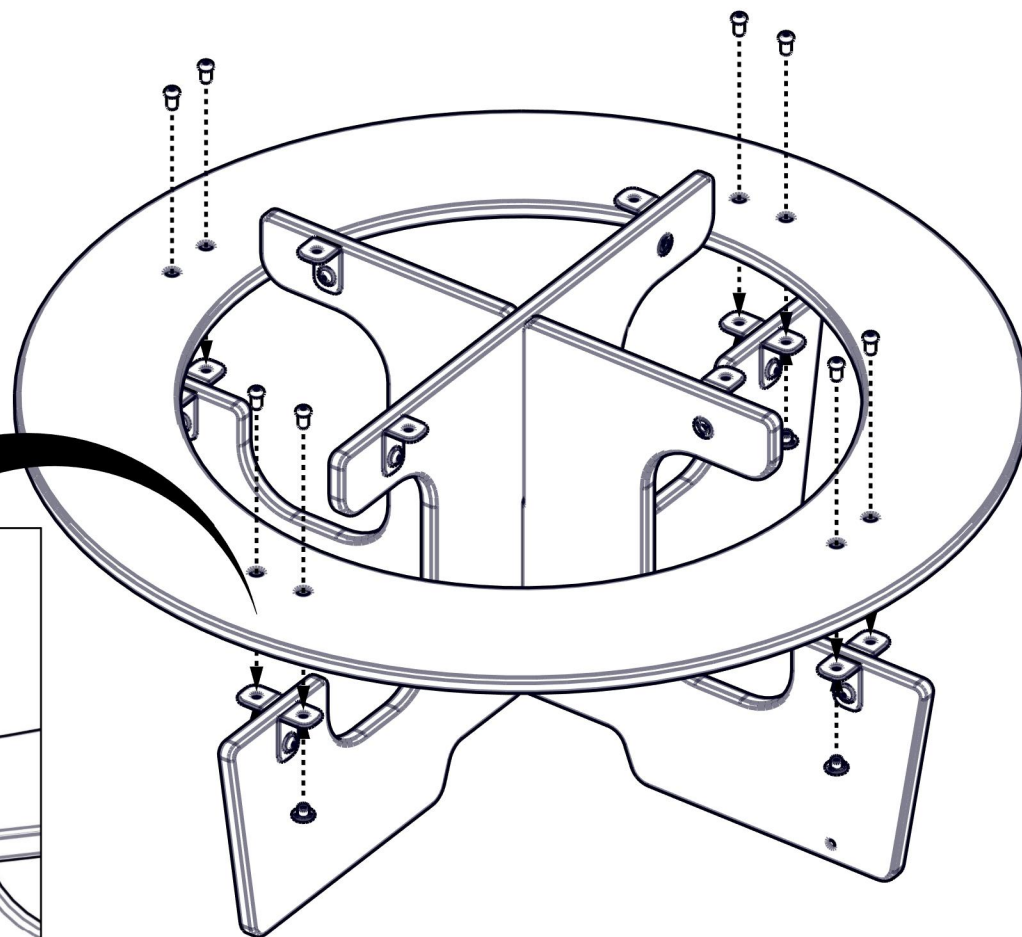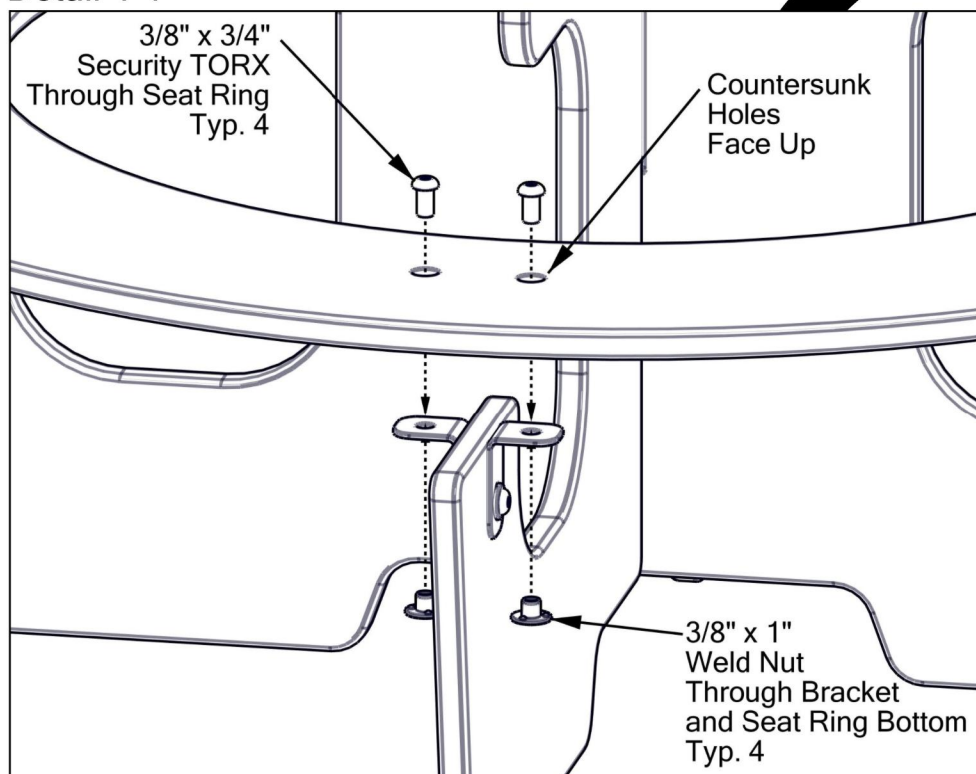

STEP 5

Secure table top to center supports. Place table top onto center supports. Countersunk holes face up. Align holes in table top with holes in brackets. Secure each location with one (1) 3/8" x 3/4" security TORX through table top and one (1) 3/8" x 1" weld nut through bracket and table top bottom. See Detail 5-1. Fully tighten all connections.

Detail 5-1

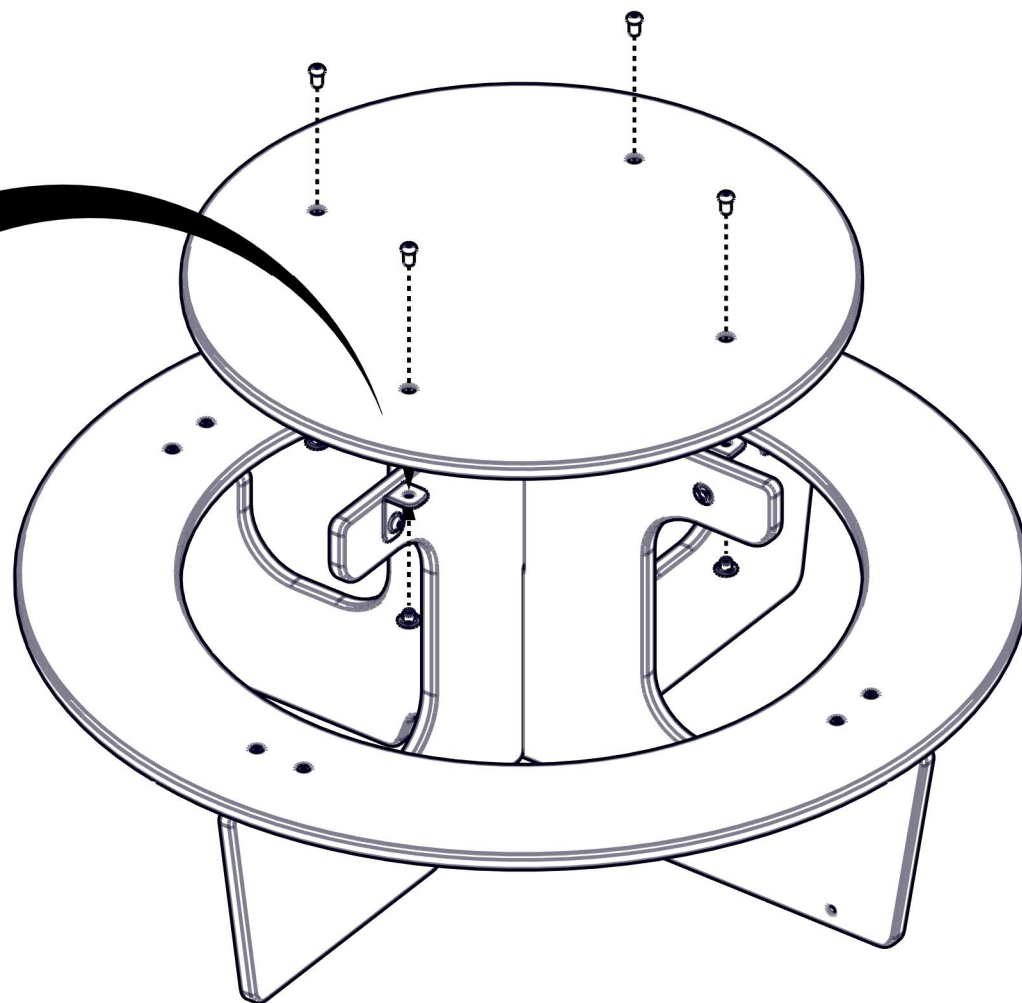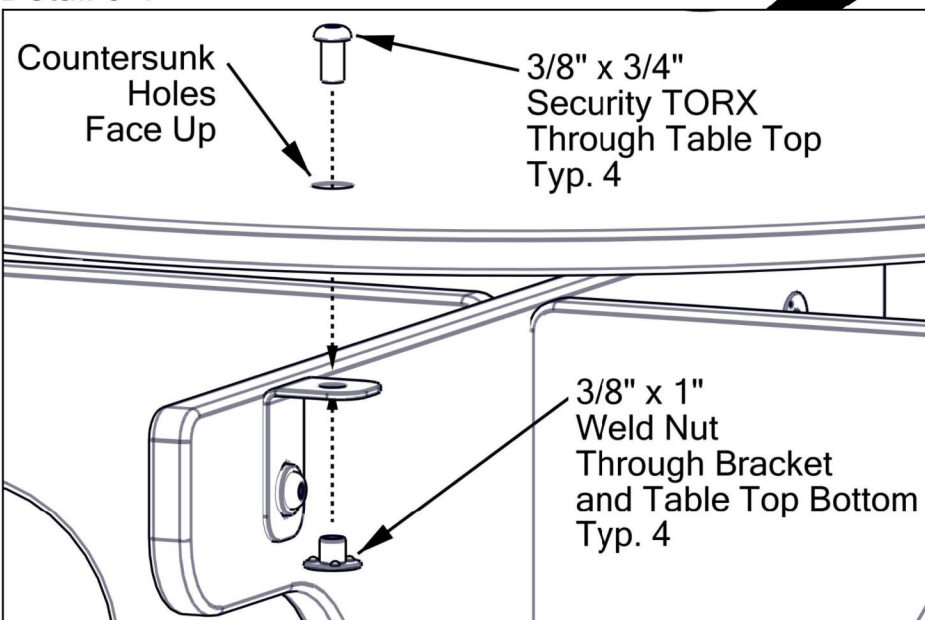

STEP 6

Check all connections and ensure structure is stable.

Installation is complete.

Place one (1) Age Appropriate Sticker
on structure in clearly visible location.

